

Leica Zeno Connect

High accuracy GNSS on all devices



Zeno Connect is an app for third party applications to manage, configure and use Leica Zeno GIS series antennas.

- Use on Windows® or Android platforms
- Easy to configure and control GNSS and RTK sources
- SDK available to integrate with custom Windows applications



Zeno Connect provides GNSS positional data either via NMEA or the Android Location Service to your own app or third party software.

- Achieve centimetre accurate GNSS positions when using an RTK connection¹
- Bluetooth® connectivity ensures cable free operation of supported antennas



Zeno Connect turns your own device into a high accuracy data collector when used with a Leica Zeno GIS antenna².

- Download and install Zeno Connect from the Google Play store for Android or from myWorld for Windows®
- Compatible with your own choice of data collection device or software

Leica Zeno Connect

FEATURES AND OPTIONS

App integration	Turn your own device into a high accuracy data collector when used with a Leica Geosystems GIS antenna. Install Zeno Connect and the toolbar will always run in the foreground of your application, handling all communication between the GNSS receiver and the app, as well the configuration of real-time differential correction sources. On Android, the accurate position will be provided via the Android Location Manager with no further setup required.
Software features	Informative and easy-to-read GNSS status bar. Easy to configure real-time differential corrections to improve accuracy. Support of raw data logging (Windows® only). Coordinate system setup (Windows® only). Use high-precision projection and transformation engines.

SOFTWARE DEVELOPMENT KIT

Integration	Embed Zeno Connect functionality into your own Windows® based software using an API. Compatible with Windows® 10, 8 and 7, Windows® Embedded Handheld 6.5 and Windows® CE 6.0. Full documentation and sample code included with installation files.
--------------------	--

SUPPORTED DEVICES


3rd party controllers	Supports Android versions 4.1 and greater for tablets or phones, and Windows® 7/8/10 PC or laptops when combined with a Leica Zeno GNSS smart antenna.
Leica GIS handhelds	Zeno 20 Android, Zeno 20 WEH, CS25 GNSS plus, CS25 GNSS, CS25 plus, CS25 LRBT, CS25, Zeno 5, Zeno 15, Zeno 10
Leica GNSS antennas	GG04, GG03, GG02 plus

SYSTEM REQUIREMENTS

Platform	PC, tablet or mobile
Operating system	Windows® 10, 8 and 7, Android 4.1 and above

ZENO CONNECT VERSIONS

Windows

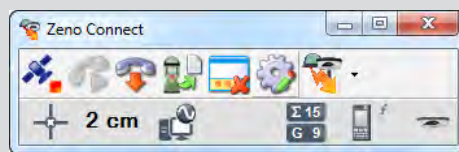

Android



- ¹ Accuracy depends on observation time, satellite constellation, number of tracked satellites, elevation mask, ionospheric disturbances, multipath signals and proximity to base station and antenna used
² Leica Geosystems cannot guarantee compatibility with all makes, models and operating systems of smartphone and tablet

The Bluetooth® word mark and logos are owned by Bluetooth SIG, Inc. and any use of such marks by Leica Geosystems AG is under license.
Microsoft, Windows® and the Windows logo are either registered trademarks or trademarks of Microsoft Corporation in the United States and / or other countries.
Other trademark and trade names are those of their respective owners.

Copyright Leica Geosystems AG, 9435 Heerbrugg, Switzerland. All rights reserved. Printed in Switzerland – 2017.
Leica Geosystems AG is part of Hexagon AB. 844100en – 03.17

Leica Geosystems AG

leica-geosystems.com



- when it has to be **right**

Leica
Geosystems