

Leica CS25 (GNSS/LRBT) plus User Manual



Version 1.0
English

- when it has to be **right**

Leica
Geosystems

Introduction

Purchase

Congratulations on the purchase of a Leica CS25 plus.



This manual contains important safety directions as well as instructions for setting up the product and operating it. Refer to "1 Safety Directions" for further information. Read carefully through the User Manual before you switch on the product.

Product identification

The type and serial number of your product are indicated on the type plate. Always refer to this information when you need to contact your agency or Leica Geosystems authorised service workshop.

Trademarks

- Windows is a registered trademark of Microsoft Corporation in the United States and other countries
 - CompactFlash and CF are trademarks of SanDisk Corporation
 - *Bluetooth*[®] is a registered trademark of Bluetooth SIG, Inc.
 - SD Logo is a trademark of SD-3C, LLC.
- All other trademarks are the property of their respective owners.

Validity of this manual

This manual applies to the Leica CS25 plus, CS25 GNSS plus and CS25 LRBT plus rugged tablet computer. Where there are differences between the various instruments they will be clearly described.

Available documentation

Name	Description/Format		
Leica CS25 (GNSS/LRBT) plus Quick Guide	Provides an overview of the product together with technical data and safety directions. Intended as a quick reference guide.	✓	✓
Leica CS25 (GNSS/LRBT) plus User Manual	All instructions required in order to operate the product to a basic level are contained in the User Manual. Provides an overview of the product together with technical data and safety directions.	-	✓

Name	Description/Format		
Zeno GIS Getting Started Guide	Describes the general working of the product in standard use. Intended as a quick reference field guide.	-	✓
Zeno Connect Getting Started Guide	Describes the general working of the product in standard use. Intended as a quick reference field guide.	-	✓
Zeno GIS Help*	Overall comprehensive help to the product and application functions. Included are detailed descriptions of special software/hardware settings and software/hardware functions.	-	-

* only available as Online Help

Refer to the following resources for all CS25 plus documentation/software:

- the Leica USB documentation card
- Windows 7 Recovery DVD (including User Guide)
- <https://myworld.leica-geosystems.com>

myWorld@Leica Geosystems (<https://myworld.leica-geosystems.com>) offers a wide range of services, information and training material.

With direct access to myWorld, you are able to access all relevant services whenever it is convenient for you, 24 hours a day, 7 days per week. This increases your efficiency and keeps you and your equipment instantly updated with the latest information from Leica Geosystems.

Service	Description
myProducts	Add all Leica Geosystems products that you and your company own. View detailed information on your products, buy additional options or Customer Care Packages (CCPs), update your products with the latest software and keep up-to-date with the latest documentation.
myService	View the service history of your products in Leica Geosystems Service Centres and detailed information on the services performed on your products. For your products that are currently in Leica Geosystems Service Centres view the current service status and the expected end date of service.
mySupport	Create new support requests for your products that will be answered by your local Leica Geosystems Support Team. View the complete history of your Support and view detailed information on each request in case you want to refer to previous support requests.
myTraining	Enhance your product knowledge with the Leica Geosystems Campus - Information, Knowledge, Training. Study the latest online training material or download training material on your products. Keep up-to-date with the latest News on your products and register for Seminars or Courses in your country.
myTrustedServices	Offers increased productivity while at the same time providing maximum security. <ul style="list-style-type: none"> • myExchange With myExchange you can exchange any files/objects from your computer to any of your Leica Exchange Contacts. • mySecurity If your instrument is ever stolen, a locking mechanism is available to ensure that the instrument is disabled and can no longer be used.

Table of Contents

In this manual	Chapter	Page
1	Safety Directions	6
1.1	General Introduction	6
1.2	Definition of Use	7
1.3	Limits of Use	7
1.4	Responsibilities	7
1.5	Hazards of Use	8
1.6	Electromagnetic Compatibility EMC	9
1.7	FCC Statement, Applicable in U.S.	11
2	Description of the System	12
2.1	Overview	12
2.2	Terminology	12
2.3	System Concept	13
2.3.1	Software Concept	13
2.3.2	Power Concept	13
2.3.3	Data Storage Concept	13
2.4	CS25 plus Components	14
3	User Interface	15
3.1	Keyboard	15
3.2	Operating Principles	16
4	Operation	17
4.1	Equipment Setup	17
4.1.1	Fixing the Display Foil to the CS	17
4.1.2	Inserting and Removing a SIM Card and SD Card	17
4.1.3	Attaching the L1/L2 GNSSHelix Antenna	20
4.2	Power Functions	20
4.3	Batteries	21
4.3.1	Operating Principles	21
4.3.2	Changing the Battery	21
4.3.3	Charging the Battery	22
4.3.4	Switching between Left and Right Battery	23
4.4	LED Indicators on CS25 plus	24
4.5	Using the Digital Camera	25
4.6	Calibrating the Touch Screen	25
5	Software	26
5.1	Menu Button Options	26
5.2	Hot Tab Software Utility Functions	27
5.3	WWAN Application	28
5.4	Installing a Language Pack in Windows 7	30
5.5	Windows Activation Guide	32
5.6	Reinstalling the Windows Operating System	32
5.7	Good to Know...	33
6	Care and Transport	34
6.1	Transport	34
6.2	Storage	34
6.3	Cleaning and Drying	35

7	Technical Data	36
7.1	CS25 plus Technical Data	36
7.2	Conformity to National Regulations	38
8	Software Licence Agreement	39

1 Safety Directions

1.1 General Introduction

Description The following directions enable the person responsible for the product, and the person who actually uses the equipment, to anticipate and avoid operational hazards.

The person responsible for the product must ensure that all users understand these directions and adhere to them.

About Warning Messages





Warning messages are an essential part of the safety concept of the instrument. They appear wherever hazards or hazardous situations can occur.

Warning messages...

- make the user alert about direct and indirect hazards concerning the use of the product.
- contain general rules of behaviour.

For the users' safety, all safety instructions and safety messages shall be strictly observed and followed! Therefore, the manual must always be available to all persons performing any tasks described herein.

DANGER, WARNING, CAUTION and **NOTICE** are standardized signal words for identifying levels of hazards and risks related to personal injury and property damage. For your safety it is important to read and fully understand the table below with the different signal words and their definitions! Supplementary safety information symbols may be placed within a warning message as well as supplementary text.

Type	Description
 DANGER	Indicates an imminently hazardous situation which, if not avoided, will result in death or serious injury.
 WARNING	Indicates a potentially hazardous situation or an unintended use which, if not avoided, could result in death or serious injury.
 CAUTION	Indicates a potentially hazardous situation or an unintended use which, if not avoided, may result in minor or moderate injury.
NOTICE	Indicates a potentially hazardous situation or an unintended use which, if not avoided, may result in appreciable material, financial and environmental damage.
	Important paragraphs which must be adhered to in practice as they enable the product to be used in a technically correct and efficient manner.




1.2

Definition of Use

Intended use	<ul style="list-style-type: none">• Remote control of product.• Data communication with external appliances.
Reasonably foreseeable misuse	<ul style="list-style-type: none">• Use of the product without instruction.• Use outside of the intended use and limits.• Disabling safety systems.• Removal of hazard notices.• Opening the product using tools, for example screwdriver, unless this is permitted for certain functions.• Modification or conversion of the product.• Use after misappropriation.• Use of products with recognisable damages or defects.• Use with accessories from other manufacturers without the prior explicit approval of Leica Geosystems.• Inadequate safeguards at the working site.• Controlling of machines, moving objects or similar monitoring application without additional control- and safety installations.

1.3

Limits of Use

Environment	Suitable for use in an atmosphere appropriate for permanent human habitation: not suitable for use in aggressive or explosive environments.
 DANGER	Local safety authorities and safety experts must be contacted before working in hazardous areas, or close to electrical installations or similar situations by the person in charge of the product.
	The following advice is only valid for battery charger, power adapter and car adapter.
Environment	Suitable for use in dry environments only and not under adverse conditions. 

1.4

Responsibilities

Manufacturer of the product	Leica Geosystems AG, CH-9435 Heerbrugg, hereinafter referred to as Leica Geosystems, is responsible for supplying the product, including the user manual and original accessories, in a safe condition.
Person responsible for the product	<p>The person responsible for the product has the following duties:</p> <ul style="list-style-type: none">• To understand the safety instructions on the product and the instructions in the user manual.• To ensure that it is used in accordance with the instructions.• To be familiar with local regulations relating to safety and accident prevention.• To inform Leica Geosystems immediately if the product and the application becomes unsafe.• To ensure that the national laws, regulations and conditions for the operation of e.g. radio transmitters or lasers are respected.

**DANGER**

Because of the risk of electrocution, it is dangerous to use poles and extensions in the vicinity of electrical installations such as power cables or electrical railways.

Precautions:

Keep at a safe distance from electrical installations. If it is essential to work in this environment, first contact the safety authorities responsible for the electrical installations and follow their instructions.

**WARNING**

During dynamic applications, for example stakeout procedures there is a danger of accidents occurring if the user does not pay attention to the environmental conditions around, for example obstacles, excavations or traffic.

Precautions:

The person responsible for the product must make all users fully aware of the existing dangers.

**WARNING**

Inadequate securing of the working site can lead to dangerous situations, for example in traffic, on building sites, and at industrial installations.

Precautions:

Always ensure that the working site is adequately secured. Adhere to the regulations governing safety and accident prevention and road traffic.

**CAUTION**

If the accessories used with the product are not properly secured and the product is subjected to mechanical shock, for example blows or falling, the product may be damaged or people can sustain injury.

Precautions:

When setting-up the product, make sure that the accessories are correctly adapted, fitted, secured, and locked in position.

Avoid subjecting the product to mechanical stress.

**WARNING**

If the product is used with accessories, for example masts, staffs, poles, you may increase the risk of being struck by lightning.

Precautions:

Do not use the product in a thunderstorm.

**CAUTION**

During the transport, shipping or disposal of batteries it is possible for inappropriate mechanical influences to constitute a fire hazard.

Precautions:

Before shipping the product or disposing of it, discharge the batteries by running the product until they are flat.

When transporting or shipping batteries, the person in charge of the product must ensure that the applicable national and international rules and regulations are observed. Before transportation or shipping contact your local passenger or freight transport company.

**WARNING**

High mechanical stress, high ambient temperatures or immersion into fluids can cause leakage, fire or explosions of the batteries.

Precautions:

Protect the batteries from mechanical influences and high ambient temperatures. Do not drop or immerse batteries into fluids.



WARNING

If battery terminals are short circuited e.g. by coming in contact with jewellery, keys, metalized paper or other metals, the battery can overheat and cause injury or fire, for example by storing or transporting in pockets.

Precautions:

Make sure that the battery terminals do not come into contact with metallic objects.



WARNING

Only Leica Geosystems authorised service workshops are entitled to repair these products.



The following advice is only valid for battery charger, power adapter and car adapter.



WARNING

If you open the product, either of the following actions may cause you to receive an electric shock.

- Touching live components
- Using the product after incorrect attempts were made to carry out repairs

Precautions:

Do not open the product. Only Leica Geosystems authorised service workshops are entitled to repair these products.



The following advice is only valid for batteries, power adapter or docking station.



WARNING

If the product is improperly disposed of, the following can happen:

- If polymer parts are burnt, poisonous gases are produced which may impair health.
- If batteries are damaged or are heated strongly, they can explode and cause poisoning, burning, corrosion or environmental contamination.
- By disposing of the product irresponsibly you may enable unauthorised persons to use it in contravention of the regulations, exposing themselves and third parties to the risk of severe injury and rendering the environment liable to contamination.

Precautions:



The product must not be disposed with household waste.

Dispose of the product appropriately in accordance with the national regulations in force in your country.

Always prevent access to the product by unauthorised personnel.

Product-specific treatment and waste management information can be downloaded from the Leica Geosystems home page at <http://www.leica-geosystems.com/treatment> or received from your Leica Geosystems dealer.

1.6

Electromagnetic Compatibility EMC

Description

The term Electromagnetic Compatibility is taken to mean the capability of the product to function smoothly in an environment where electromagnetic radiation and electrostatic discharges are present, and without causing electromagnetic disturbances to other equipment.



WARNING

Electromagnetic radiation can cause disturbances in other equipment.

Although the product meets the strict regulations and standards which are in force in this respect, Leica Geosystems cannot completely exclude the possibility that other equipment may be disturbed.

The product is a class A product when operated with the internal batteries. In a domestic environment this product may cause radio interference in which case the user may be required to take adequate measures.



CAUTION

There is a risk that disturbances may be caused in other equipment if the product is used with accessories from other manufacturers, for example field computers, personal computers or other electronic equipment, non-standard cables or external batteries.

Precautions:

Use only the equipment and accessories recommended by Leica Geosystems. When combined with the product, they meet the strict requirements stipulated by the guidelines and standards. When using computers or other electronic equipment, pay attention to the information about electromagnetic compatibility provided by the manufacturer.



CAUTION

Disturbances caused by electromagnetic radiation can result in erroneous measurements.

Although the product meets the strict regulations and standards which are in force in this respect, Leica Geosystems cannot completely exclude the possibility that the product may be disturbed by intense electromagnetic radiation, for example, near radio transmitters, two-way radios or diesel generators.

Precautions:

Check the plausibility of results obtained under these conditions.



CAUTION

If the product is operated with connecting cables attached at only one of their two ends, for example external supply cables, interface cables, the permitted level of electromagnetic radiation may be exceeded and the correct functioning of other products may be impaired.

Precautions:

While the product is in use, connecting cables, for example product to external battery, product to computer, must be connected at both ends.

Radios or digital cellular phones



WARNING

Use of product with radio or digital cellular phone devices:

Electromagnetic fields can cause disturbances in other equipment, in installations, in medical devices, for example pacemakers or hearing aids and in aircraft. It can also affect humans and animals.


Precautions:

Although the product meets the strict regulations and standards which are in force in this respect, Leica Geosystems cannot completely exclude the possibility that other equipment can be disturbed or that humans or animals can be affected.

- Do not operate the product with radio or digital cellular phone devices in the vicinity of filling stations or chemical installations, or in other areas where an explosion hazard exists.
 - Do not operate the product with radio or digital cellular phone devices near to medical equipment.
 - Do not operate the product with radio or digital cellular phone devices in aircraft.
-

**WARNING**

Changes or modifications not expressly approved by Leica Geosystems for compliance could void the user's authority to operate the equipment.

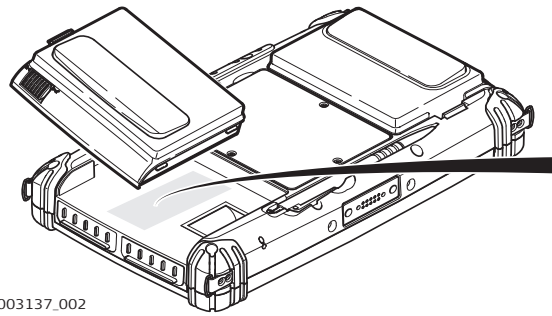Labelling CS25 plus


003137_002

Product Name: 7" Rugged Tablet PC Model No: CS25 Power: 12V±4.16A Leica Geosystems AG CH-9435 Heerbrugg Manufactured Date : Made in Taiwan	This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation. This Class B digital apparatus meets all requirements of the Canadian Interference-Causing Equipment Regulations. Cet appareil numérique de la Classe B respecte toutes les exigences du Règlement sur le matériel brouilleur du Canada.    
--	--

2 Description of the System

2.1 Overview

System components

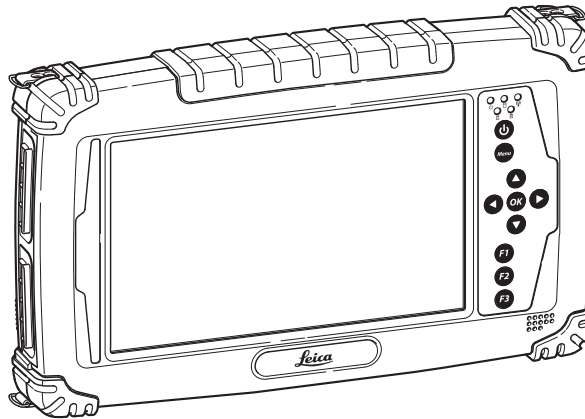


CS25.001

2.2 Terminology

CS25 plus general description

The CS25 plus is a compact high performance, low weight rugged tablet computer designed for outdoor & fieldwork usage. The CS25 plus can withstand severe environmental conditions including vibration, shock, moisture and temperature variations. The CS25 plus is suitable for use in harsh environments such as construction sites, warehouses, military, manufacturing and field service.

CS25 plus available models

Model	Touch screen	Colour display	Internal GSM/CDMA/UMTS modem	Internal batteries *1	128 GB SSD (solid-state drive)	Bluetooth (standard short range)	Bluetooth (long range)	Wireless LAN 802.11b/g	Windows 7 Ultimate	L1/L2 GNSS board
CS25 plus	✓	✓	✓	✓	✓	✓	-	✓	✓	-
CS25 GNSS plus	✓	✓	✓	✓	✓	✓	-	✓	✓	✓
CS25 LRBT plus	✓	✓	✓	✓	✓	-	✓	✓	✓	-
 Use the supplied stylus on the screens of the touch screen.										

*1 removable

2.3 System Concept

2.3.1 Software Concept

Software for CS25 plus tablet computer

Software type	Description
Windows 7 ultimate	This software includes: <ul style="list-style-type: none">- The language-specific version of Windows 7.- The basic functionality of the CS.

2.3.2 Power Concept

General

Use the batteries, chargers and accessories recommended by Leica Geosystems to ensure the correct functionality of the instrument.

Power options

Model	Power supply
CS25 plus	Internally by ALG7-08B ^{*1} battery, OR Externally by ALG7-13B ^{*2} AC/DC adapter, OR Externally by HH-12VB car adapter If an external power supply is connected and the internal batteries are inserted, then the external power is used. The internal batteries are charged.

^{*1} manufacturer: JHT energy International Co Ltd

^{*2} manufacturer: EDAC Power Electronics Co Ltd

2.3.3 Data Storage Concept

Description

Data is stored on a memory device. The memory device can be a USB stick or internal memory.

Memory device

USB stick: The tablet computer has a USB port fitted as standard.
Internal memory: The tablet computer has an internal memory fitted as standard. Available capacity: 128 GB.
SDXC card: The tablet computer has an SDXC card slot. Maximum SDXC card size: 2 TB




The delivered Leica Geosystems USB flash drive contains system software and is not certified for permanent data transfer i.e. as data storage for measurement data. Use only certified industrial grade USB flash drives such as the Leica MS1 (order number 765199).




Unplugging the USB stick from the CS25 plus tablet computer without safely remove the USB stick before can cause loss of data. Only unplug the USB stick when the CS25 plus tablet computer is switched off or after you have used Safely Remove Hardware function of the CS25 plus tablet computer.

Upside of CS25 plus

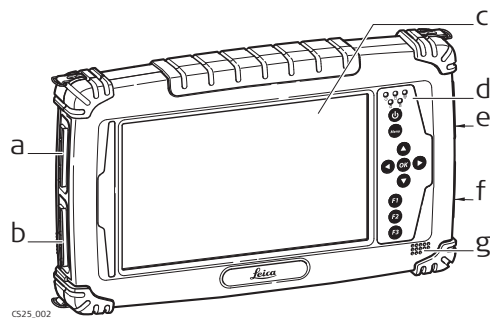

- a) DSUB9 port
- b) USB host port for USB stick
- c) Screen
- d) Keyboard
- e) Micro in, Audio out and LAN
- f) Power socket and USB host port for USB stick
- g) Speaker

Underside of CS25 plus

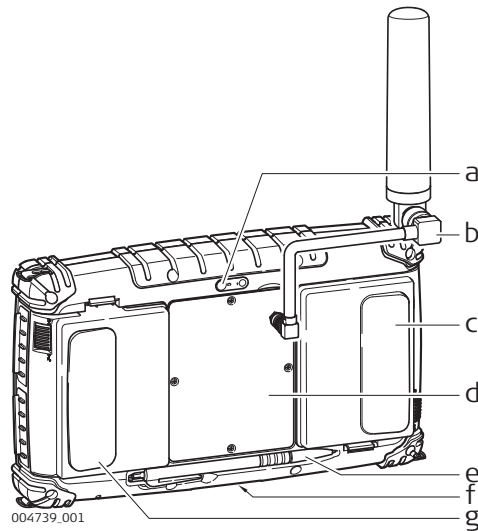


- a) Digital camera
- b) Helix antenna for CS25 GNSS plus
- c) Battery compartment R
- d) SIM card slot
- e) Stylus
- f) Docking station contacts
- g) Battery compartment L

3 User Interface





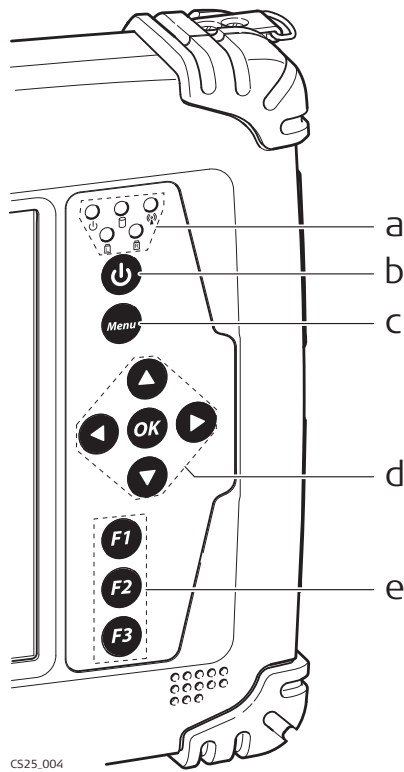





3.1 Keyboard

Keyboard display CS25 plus



- a) LED indicators
- b) ON/OFF
- c) Menu
- d) Arrow keys, OK
- e) Function keys

Keys

Key	Function
ON/OFF 	If CS25 plus already off: Turns on CS25 plus when held for 5 s. If CS25 plus already on: <ul style="list-style-type: none"> • Puts CS25 plus into stand-by mode when held < 4 s. • Turns off CS25 plus when held for 8 s.
Menu 	Start Menu button options.
Arrow keys    	Move the focus on the screen.
OK 	Selects the highlighted line and leads to the next logical menu / dialog.
Function keys F1-F3   	Programmable hotkeys. F2 short: Measure a feature in Zeno Field v3.11 or higher

Keyboard and touch screen

The user interface is operated either by the keyboard or by the touch screen with supplied stylus. The workflow is the same for keyboard and touch screen entry, the only difference lies in the way information is selected and entered.

Operation by keyboard

Information is selected and entered using the keys. Refer to "3.1 Keyboard" for a detailed description of the keys on the keyboard and their function.

Operation by touch screen

Information is selected and entered on the screen using the supplied stylus.

Operation	Description
To select an item	Tap on the item.
To start the edit mode in editable fields	Tap on the editable field.
To highlight an item or parts of it for editing	Drag the supplied stylus from the left to the right.
To accept data entered into an editable field and exit the edit mode	Tap on the screen outside of the editable field.
To open a context-sensitive menu	Tap on the item and hold for 2 s.

4

Operation


4.1

Equipment Setup

4.1.1

Fixing the Display Foil to the CS

Fixing the display foil to the CS25 plus tablet computer step-by-step

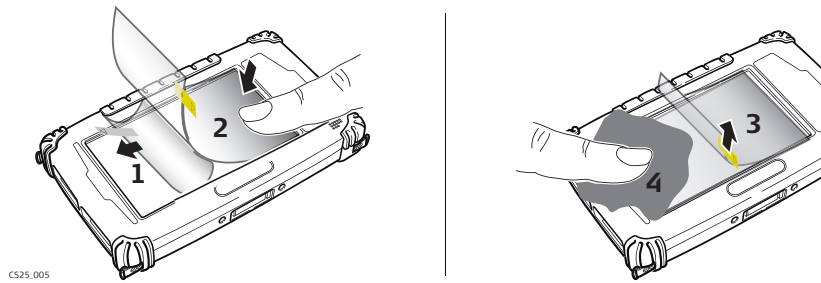

Step	Description
	Ensure that the display of the CS25 plus is free of dust and grease.
	The non-reflecting display foil has a silver-coloured sticker to peel away the carrier foil from the actual display foil.
1.	Touch the silver-coloured sticker with two fingers and pull it slowly upwards. The carrier foil is peeling away. Do not peel the carrier foil more than 2 cm - 3 cm away.
2.	Fix the laid open adhesive underside of the display foil at the display border. Pay attention that the display foil is not fixed between display and display frame.
3.	Peel away the carrier foil bit by bit and smooth it out slowly onto the display.
4.	Potential air bubbles between display and display foil have to be smoothed out using the included microfibre cloth. Do not use sharp objects!

4.1.2

Inserting and Removing a SIM Card and SD Card



- Keep the card dry.
- Use it only within the specified temperature range.
- Do not bend the card.
- Protect the card from direct impacts.



Failure to follow these instructions could result in data loss and/or permanent damage to the card.



CAUTION

Always ground yourself to remove any static charge before touching the CPU card. The electronic devices are sensitive to static electricity.

Precautions:


- 1) Only experienced personnel should open the mechanical housing of the tablet computer.
- 2) Use a grounding wrist strap all the time.
- 3) Place all the electronic components in a static-dissipative surface or static-shielded bag when they are not in the chassis.



Apply general practice for working with static-sensitive devices when you open the tablet computer, insert the SIM or SD card and closing the tablet computer:


- Discharge any static charge before opening the tablet computer and working with the SIM or SD card.
- The tablet computer must not be subject to high electrostatic potentials when it is open.
- Minimise contact with internal components of the tablet computer.
- Avoid any discharges of static electricity near the tablet computer when inserting the SIM or SD card.

Insert and remove a SIM card step-by-step

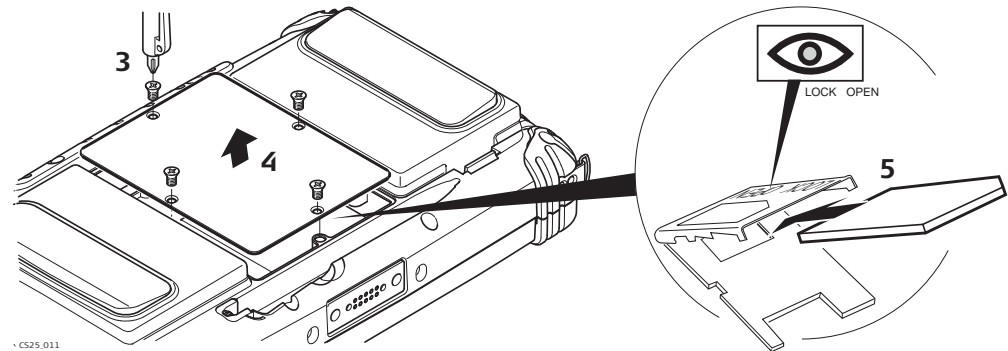

Step	Description
	The SIM card is inserted into a SIM card holder inside the tablet computer.
	For CS25 LRBT plus: Remove the Long Range Bluetooth module labelled 'bluegiga' before inserting the SIM card.
1.	Turn off the tablet computer.
2.	Turn over the tablet computer to the underside.
3.	Loosen the screws inside the cover using the screwdriver end of the stylus.
4.	Detach the cover from the tablet computer. For CS25 GNSS plus: Detach the cover carefully to not damage the cables of the Helix antenna.
5.	For CS25 LRBT plus: Remove the screw in order to access the SIM card. Slightly lift the cover plate.
6.	Slide the SIM card firmly into the slot. Do not force the card into the slot. The card should be held with the contacts facing the slot.
7.	Close the SIM card holder and push into locked position.
8.	Attach the slot cover and tighten the screws.
9.	To remove the card, detach the slot cover of the tablet computer.
10.	Open the SIM card holder and remove the SIM card.
11.	Remove the SIM card and attach the slot cover.

Insert and remove an SD card step-by-step

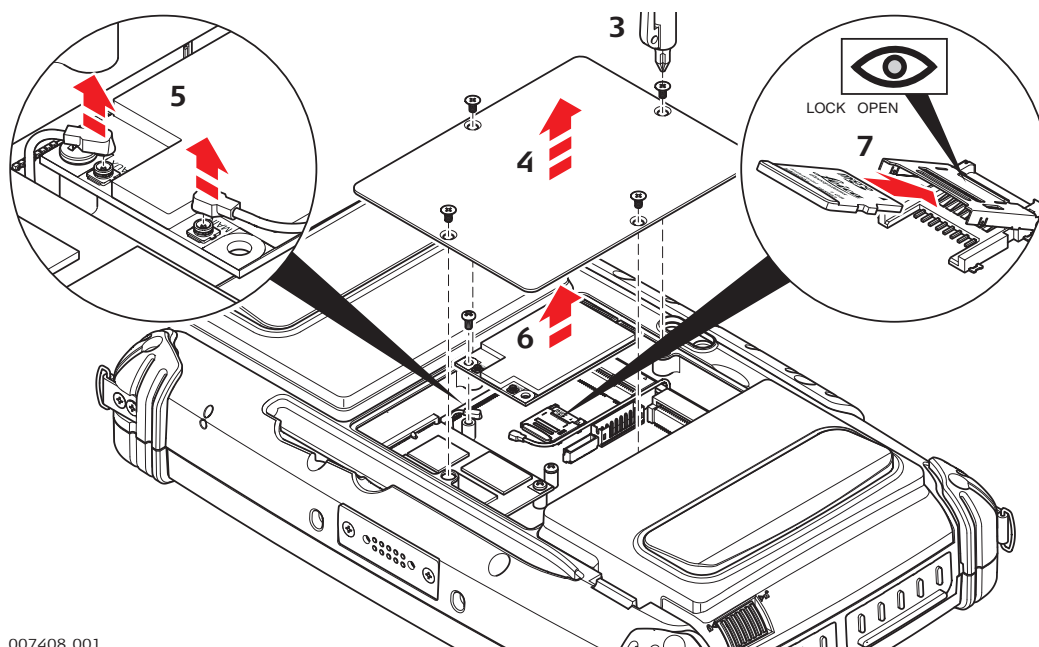


007408_001


Step	Description
	The SD card is inserted into an SD card holder inside the tablet computer.
1.	Turn off the tablet computer.
2.	Turn over the tablet computer to the underside.
3.	Loosen the screws inside the cover using the screwdriver end of the stylus.
4.	Detach the cover from the tablet computer. For CS25 GNSS plus: Detach the cover carefully to not damage the cables of the Helix antenna.
5.	Remove the two cables on the tablet computer.
6.	Loosen the screw fixing the modem. The SD card slot is visible.
7.	Slide the SD card firmly into the slot. Do not force the card into the slot. The card should be held with the contacts facing the slot.
8.	Close the SD card holder and push into locked position.
9.	Insert the modem and tighten the screws.
10.	Attach the two cables in their original position.
11.	Attach the slot cover and tighten the screws.


4.1.3

Attaching the L1/L2 GNSS Helix Antenna

Attach Helix antenna step-by-step

 Valid for CS25 GNSS plus only.

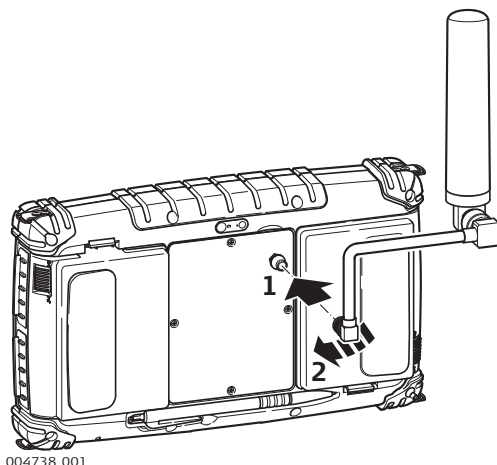


Step	Description
	Ensure that the Helix antenna connector and the linkage on the backside of the CS25 GNSS plus is free of dust and grease.
1.	Turn over the CS25 GNSS plus tablet computer to the underside.
2.	Hold the Helix antenna at the end of the antenna connector.
3.	Insert the antenna connector into the female connector on the CS25 GNSS plus until it clicks into place.


4.2

Power Functions

Turning tablet computer on step-by-step

Step	Description
1.	Place the tablet computer on a flat and stable surface or hold the tablet computer in your hand.
2.	Ensure that the tablet computer is either connected with the AC power adapter or the batteries are charged up.
3.	Press and hold power key () for 5 s.

Turning tablet computer off step-by-step

Step	Description
1.	Use the "Shut Down" command of your operating system to turn off the tablet computer.  Wait for at least five seconds after turning off the tablet computer before turning it back on.

Battery power system

The CS25 plus tablet computer is designed to work with two removable battery packs placed inside the battery pack compartment. The fully charged battery packs provide several hours of battery life, which can further be extended by using power management features through the BIOS setup. The system includes power management software which allows the battery to report the amount of charge percentage left in the battery. Refer to "5.2 Hot Tab Software Utility Functions".

4.3.1

Operating Principles

First-time use / Charging batteries

- The battery must be charged prior to using it for the first time.
- The permissible temperature range for charging is between 0°C to +40°C/ +32°F to +104°F. For optimal charging, we recommend charging the batteries at a low ambient temperature of +10°C to +20°C/+50°F to +68°F if possible.
- It is normal for the battery to become warm during charging. Using the chargers recommended by Leica Geosystems, it is not possible to charge the battery if the temperature is too high.
- For Li-Ion batteries, a single refreshing cycle is sufficient. We recommend carrying out a refreshing cycle when the battery capacity indicated on the charger or on a Leica Geosystems product deviates significantly from the actual battery capacity available.


Operation / Discharging

- The batteries can be operated from -20°C to +55°C/-4°F to +131°F.
- Low operating temperatures reduce the capacity that can be drawn; high operating temperatures reduce the service life of the battery.

4.3.2

Changing the Battery


Insert the battery on the CS25 plus tablet computer step-by-step

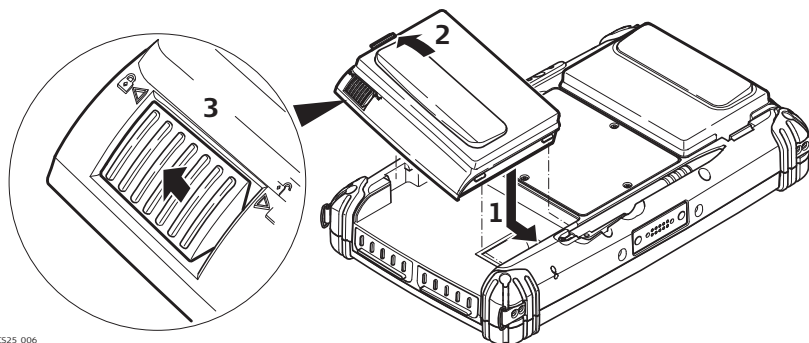

CS25_006

Step	Description
	Turn CS25 plus tablet computer over to gain access to the battery compartments.
1.	Place the battery into the battery compartment.
2.	Press the battery down into the battery compartment until it clicks into position.
3.	Pushing the slide fastener in the direction of the arrow with the close-lock symbol to fasten the battery. The battery must be locked to ensure IP65 protection. Refer to "Environmental specifications".

Remove the battery on the CS25 plus tablet computer step-by-step

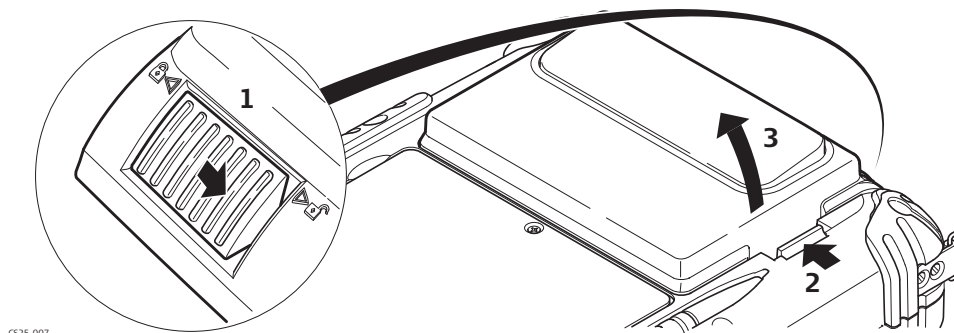

Step	Description
	Turn CS25 plus tablet computer over to gain access to the battery compartments.
1.	Push the slide fastener in the direction of the arrow with the open-lock symbol to release the battery.
2.	Press simultaneously on the top side and on the bottom side of the battery.
3.	Remove the battery from the battery compartment.

4.3.3

Charging the Battery



WARNING

If unit is not connected to ground, death or serious injury can occur.

Precautions:

To avoid electric shock power cable and power outlet must be grounded.



The following advice is only valid for battery charger, power adapter and car adapter.



WARNING

If you open the product, either of the following actions may cause you to receive an electric shock.

- Touching live components
- Using the product after incorrect attempts were made to carry out repairs

Precautions:

Do not open the product. Only Leica Geosystems authorised service workshops are entitled to repair these products.



The following advice is only valid for batteries, power adapter or docking station.



WARNING


The product is not designed for use under wet and severe conditions. If unit becomes wet it may cause you to receive an electric shock.

Precautions:

Use the product only in dry environments, for example in buildings or vehicles. Protect the product against humidity. If the product becomes humid, it must not be used!



Charge battery step-by-step

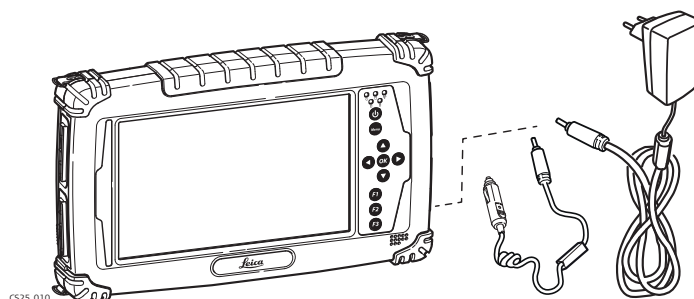

Step	Description
	Only use the charger delivered with the tablet computer.
	When charging the batteries, the tablet computer can be on or off. Charging is faster when the tablet computer is off.
1.	Connect the ALG7-13B power adapter or HH-12VB car adapter with the tablet computer and an A/C plug. The batteries start charging.
2.	The power LED on the tablet computer switches on. When tablet computer's batteries are fully charged the LED switches off again. Refer to "LED indicators" for information about the power LED.

Battery charging modes

Balanced battery charging mode

Both battery packs are at a very low-power level of << 10% of their charging capacity.

- The second battery is charged first if the difference of the battery power level is 5% or more.
- If the difference of the battery power level both batteries is less than 5%, the batteries are charged simultaneously.

Dual battery charging mode

Both battery packs are at a low-power level about of 10% of their charging capacity.

- If the power level of both batteries is below 10%, the batteries are charged simultaneously.
- If the power level of both batteries is higher than 10%, the tablet computer switches into balanced charging mode.
- If one battery is fully charged while the other one is at a low-power level, the low-power battery is charged.
- If both batteries are fully charged, charging is switched off automatically.

4.3.4

Switching between Left and Right Battery

Switch between left and right battery step-by-step


Step	Description
	Left battery and right battery are located on the underside. Refer to "2.4 CS25 plus Components".
	Press and release Menu button three times. The status of batteries and current battery usage window appears on the screen. Refer to "5.1 Menu Button Options".
1.	Press and hold F3 for 3 s. The CS25 plus tablet computer switches from left to right battery.
2.	The battery status is shown on both the screen and the OSD indicator.

LED indicators

Description

The CS25 plus tablet computer has Light Emitting Diode indicators. They indicate the basic tablet computer status.

Diagram

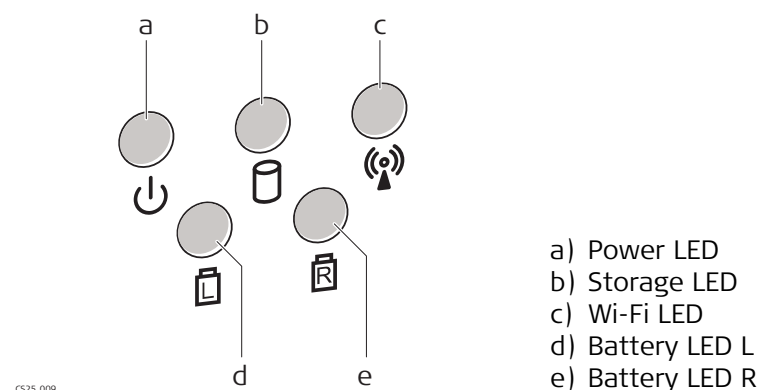

CS25_009

Description of the LEDs

IF the	is	THEN
Power LED	off	power is off.
	green	power is okay.
Storage LED	off	no data are stored.
	flashing green	HD is reading. Data is being written.
Wi-Fi LED	off	Wi-Fi is off.
	flashing green	CS25 plus is connected to a wireless network.
Battery LED L	off	power is okay. The battery is fully charged, CS25 plus tablet computer is externally powered by AC adapter or right battery is discharging.
	green	power is ok. The battery is being discharged.
	orange	power is ok. The battery is being charged.
	red	power is low (< 3%) or battery is bad. It is not allowed to switch discharge status to left battery. Change the battery.
Battery LED R	off	power is okay. The battery is fully charged, CS25 plus tablet computer is externally powered by AC adapter or left battery is discharging.
	green	power is ok. The battery is being discharged.
	orange	power is ok. The battery is being charged.
	red	power is low (< 3%) or battery is bad. It is not allowed to switch discharge status to right battery. Change the battery.

4.5

Using the Digital Camera

Overview

The CS25 plus tablet computer is equipped with a digital camera located at the under-side. Refer to "2.4 CS25 plus Components".



Taking a picture step-by-step

Step	Description
1.	Press F1 function key to start HotTab Hotkey Utility application. Refer to "5.2 Hot Tab Software Utility Functions".
2.	Assign Webcam to F2 Short function key.
3.	Press and release F2 function key to start the digital camera application. 
4.	Aim the camera to the desired target.
5.	Check the view at the display.
6.	Click the camera icon on the top bar to take the picture.  The digital camera application allows recording videos as well as taking images. In addition, the LED light can be turned on and off.
7.	Click the return icon on the top bar to store the picture and to return to the main menu. Click the garbage icon to reject the picture.

4.6

Calibrating the Touch Screen





Calibrate the touch screen step-by-step




Step	Description
1.	Turn on the CS25 plus tablet computer. Refer to "4.2 Power Functions".
2.	Click on Start button, then go to Control Panel .
3.	In Category view, click on Hardware and Sound link, click on Tablet PC Settings and then go to Display Tab.  In Icons view, click on Tablet PC Settings icon, and then go to Display Tab.
4.	Click on Calibrate... to start the Digitizer Calibration Tool .
5.	Tap the crosshair with the stylus each time it appears on the screen.  A window pops up when the calibration process is completed.
6.	Click on Yes to save the calibration data or click on No to reject the calibration data.

Menu button options

The following six **Menu** options are available on the tablet computer:

- 1) Screen brightness
- 2) Volume
- 3) Battery usage and battery status
- 4) Wireless communication function
- 5) System information about software versions
- 6) Keyboard lock

Menu button	Function
Press and release once	<p>Shows status of screen brightness.</p>  <p>To increase the screen brightness: Press right arrow button or drag bar with the stylus.</p> <p>To decrease the screen brightness: Press left arrow button or drag bar with the stylus.</p>
Press and release twice	<p>Shows status of volume.</p>  <p>To increase the volume: Press right arrow button or drag bar with the stylus.</p> <p>To decrease the volume: Press left arrow button or drag bar with the stylus.</p>
Press and release three times	<p>Shows status of batteries and current battery usage.</p> 
Press and release four times	<p>Shows status of wireless communication functions and LED indicator.</p>  <p>Press up/down arrow button or tick with the stylus to highlight a specific wireless communication function.</p> <p>Press left/right arrow button or tick with the stylus:</p> <ul style="list-style-type: none"> • If wireless communication function is enabled: Disables wireless communication function. • If wireless communication function is disabled: Enables wireless communication function. <p>Checking/unchecking of the LED indicator turns on/off the LEDs of the tablet computer.</p>

Menu button	Function
Press and release five times	Shows current software version. 
Press and hold for 5 s	Locks/unlocks keyboard.   If keyboard is unlocked: Locks keyboard. If keyboard is locked: Unlocks keyboard.



5.2




Hot Tab Software Utility Functions

Hot Tab software utility functions

The following functions are available on the tablet computer:

- 1) Virtual Mouse
- 2) Onscreen Keyboard
- 3) Camera
- 4) Windows Power Management
- 5) Touch Lock





Function	Description of function
Hot Tab software utility functions	Press F1 short and release to start Hot Tab software utility functions. 
Virtual Mouse	Click Virtual Mouse to open a virtual mouse on the screen.
Onscreen Keyboard	Click Onscreen Keyboard to open a keyboard on the screen. 
Camera	Click Camera to open camera on the screen.
Programmable hotkey	You can assign a function of your choice to the function keys F1 Long, F2 Short, F2 Long, F3 Short and F3 Long. Select F1 Long, click Browse and select the desired program file you want to assign to F1 Long. Press and hold F1 for 4 s to perform the function configured for F1 Long. Press F2 short and release to perform the function configured for F2 Short. Press and hold F2 for 4 s to perform the function configured for F2 Long.


Function	Description of function
	Press F3 short and release to perform the function configured for F3 Short.
Switch battery	Press and hold F3 for 4 s to toggle between the batteries.  The target battery energy level should be > 10 %.
Windows Power Management	Click Performance to open Windows Power Management. 
Touch Lock	Click Touch Lock to lock the touch screen. To unlock the touch screen move the arrow to the right. 

5.3

WWAN Application

Start WWAN application step-by-step




Step	Description
1.	Insert SIM card. Refer to "4.1.2 Inserting and Removing a SIM Card and SD Card".
	Ensure that 3G is checked in the Wireless communication status. Refer to "5.1 Menu Button Options". 
2.	Double-Click AirCard Watcher shortcut from the desktop when the modem has been activated. The AirCard Watcher application window appears. 
3.	Click Connect . The software loads automatically the required settings and establishes a connection to the Internet.  You are connected to the Internet when the software indicates connected. Use the Internet Explorer to access the Internet.

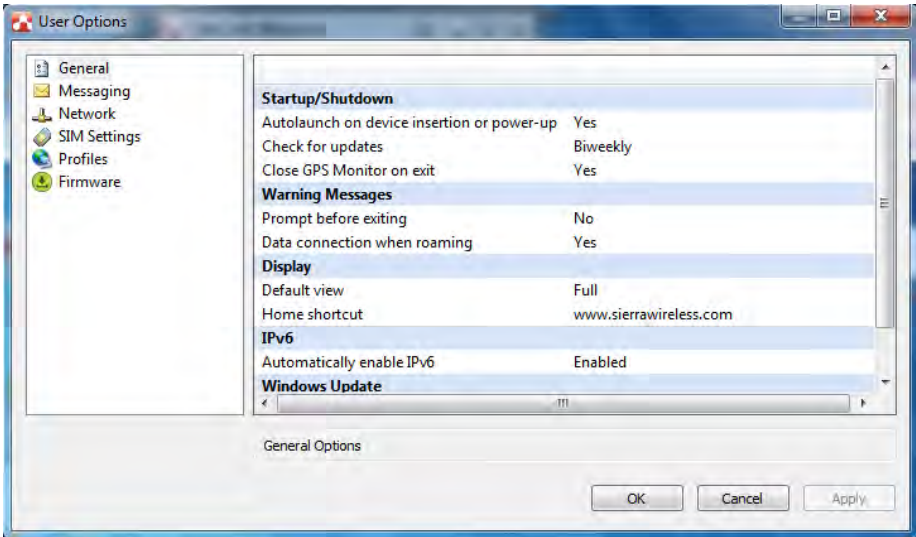
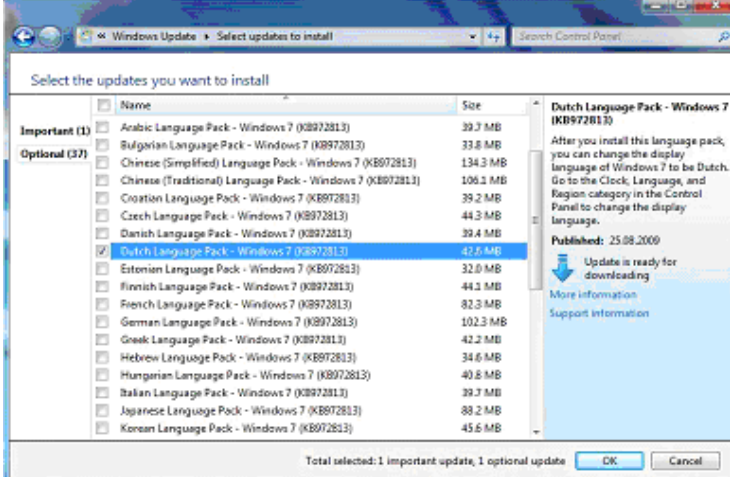



Step	Description
4.	<p>When the connection cannot be established, click Options and select the correct settings manually.</p>  <p>☞ Contact your internet service provider for the correct settings!</p>
5.	Click Set Profile to store the settings and continue with step 3..

Description

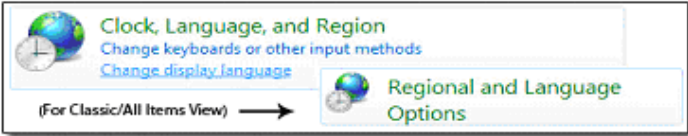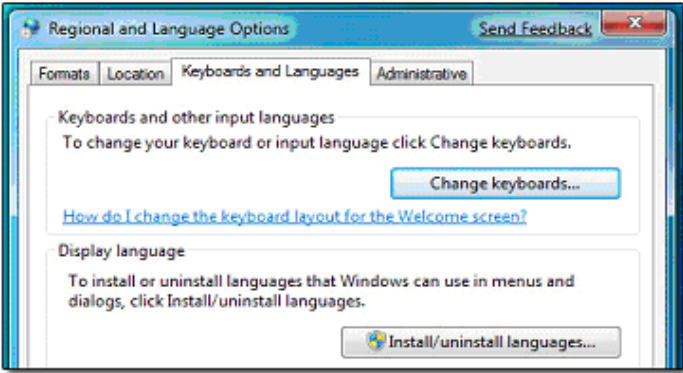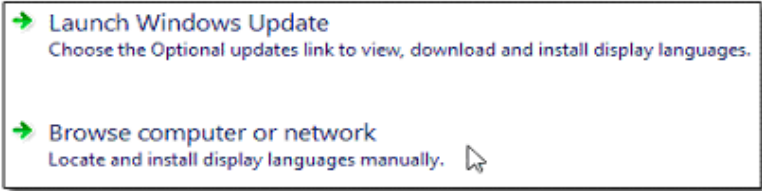


The user interface of Windows 7 can be translated and converted to another language, with the use of a language pack. The language pack is commonly known as MUI (Multi-lingual User Interface). With language pack, text in wizards, dialog boxes, menus, and other components can be converted into another display language. Additional language packs are only supported Windows 7 Ultimate and Windows 7 Enterprise. You can download additional language packs by Windows Update.

Install language pack on the tablet computer step-by-step

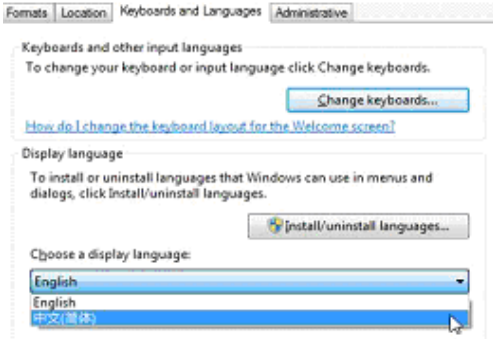



Step	Description
1.	Click on Start button, then go to Control Panel .
2.	<p>In Category view, click on Clock, Language, and Region link.</p>  <p>In Icons view, click on Regional and Language Options icon, and then go to Keyboards and Languages Tab.</p> 
3.	Click on Install or uninstall display languages under "Region and Language" section or Install/uninstall languages under "Display Language" section.
4.	In the "Install or uninstall display languages" wizard, click on Install display languages .
5.	Click Launch Windows Update and install language packs manually.
	

Step	Description
6.	<p>Click XX optional updates are available.</p> 
7.	<p>Tick the Language Pack you want to install and click OK to install it.</p> 
	<p>The installation can take a while. Once the installation is finished, you can directly switch to the installed language pack. When you switch language packs, you have to log off and on again.</p>
	<p>To change to a language pack that has already been installed, go to Keyboards and Languages Tab in Regional and Language Options window and choose the display language desired.</p> 


Activate Windows step-by-step

Step	Description
	Ensure to have your licence code available. It is located under the (L) left battery (bottom sight).
1.	Establish an Internet connection using Wi-Fi or an Ethernet cable.
2.	Click on Start button, then go to Control Panel .
3.	In Category view, click on System and Security link and click on System .  In Icons view, click on System icon.
4.	Scroll down to the bottom of the screen and click on You must activate today, Activate Windows now .
5.	Click on Activate Windows online now . When the activation was successful, at the bottom of the System screen the message Windows is activated is displayed.
	If you are not able to establish an Internet connection using Wi-Fi or an Ethernet cable, select See other ways to activate . Select Use the automated phone system and follow the instructions.

Reinstalling the Windows Operating System step-by-step

Step	Description
	A reinstallation of the operating system deletes all files on the CS25 plus. Backup all important data before starting a reinstallation.
	Requirements: <ul style="list-style-type: none"> • Bootable USB stick with a copy of the latest Windows installation files or • CD drive with the Windows installation CD
1.	Plug the USB stick or the CD drive into the USB host port for USB stick.
2.	Start the CS25 plus. Instantly press F3 on the CS25 plus to open up the BIOS boot priorities.
3.	Select the USB stick or the CD drive as highest boot priority.
4.	Confirm twice that you want to install a fresh operating system. Use the  and  key to navigate. Use OK to confirm.
5.	The installation starts. The status of the installation is displayed.

My WLAN does not see any networks, what can be wrong?

Step	Description
1.	Click on your wireless network icon and select "Open network and sharing center".
2.	Click "Change adapter settings" on the left side.
3.	Click and hold the stylus on "Wireless Network Connection" and select properties.
4.	Click "Configure" and choose the "Advanced" Tab.
5.	Select the option "Radio On/Off", select "Enable" in the field "Value" and click OK .  WLAN should work as intended.

How to do a Ctrl+Alt+Delete-sequence on the tablet computer?

Step	Description
1.	Press simultaneously () and () button.

6 Care and Transport

6.1 Transport

Transport in a road vehicle	Never carry the product loose in a road vehicle, as it can be affected by shock and vibration. Always carry the product in its transport container, original packaging or equivalent and secure it.
Shipping	When transporting the product by rail, air or sea, always use the complete original Leica Geosystems packaging, transport container and cardboard box, or its equivalent, to protect against shock and vibration.
Shipping, transport of batteries	When transporting or shipping batteries, the person in charge of the product must ensure that the applicable national and international rules and regulations are observed. Before transportation or shipping, contact your local passenger or freight transport company.

6.2 Storage



Product	Respect the temperature limits when storing the equipment, particularly in summer if the equipment is inside a vehicle. Refer to "Technical Data" for information about temperature limits.
Li-Ion batteries	<ul style="list-style-type: none">• Refer to "Technical Data" for information about storage temperature range.• Remove batteries from the product and the charger before storing.• After storage recharge batteries before using.• Protect batteries from damp and wetness. Wet or damp batteries must be dried before storing or use.• A storage temperature range of 0°C to +30°C / +32°F to +86°F in a dry environment is recommended to minimize self-discharging of the battery.• At the recommended storage temperature range, batteries containing a 40% to 50% charge can be stored for up to one year. After this storage period the batteries must be recharged.

Product and accessories

- Use only a clean, soft, lint-free cloth for cleaning. If necessary, moisten the cloth with water or pure alcohol. Do not use other liquids; these may attack the polymer components.

Damp products

Dry the product, the transport container, the foam inserts and the accessories at a temperature not greater than 40°C/104°F and clean them. Remove the battery cover and dry the battery compartment. Do not repack until everything is dry. Always close the transport container when using in the field.

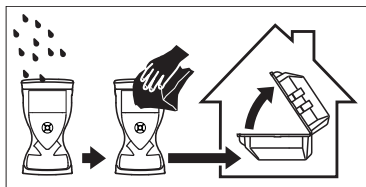**Cables and plugs**

Keep plugs clean and dry. Blow away any dirt lodged in the plugs of the connecting cables.

Connectors with dust caps

Wet connectors must be dry before attaching the dust cap.

Control unit

Display:

WSVGA (1024 x 600 pixels),
graphics capable LCD, illumination,
touch screen, colour

Keyboard:

10 keys

Touch screen:

Toughened film on glass

Sound:

Integrated sealed speaker and microphone

Digital camera:

Resolution: 1600 x 1200 pixels, fixed focus lens, image
capture: JPEG

System

CPU:

Intel® Atom™ N2600 1.6 GHz Dual Core

System Chipset:

Intel US15W

BIOS:

AMI System BIOS

System Memory:

4 GB DDR3 RAM

Ethernet:

Realtek RTL811B chipset, 10/100/1000 Mbps

Storage:

PATA interface support Mini-PCle interface SSD (default
128 GB)

Audio:

Audio out for headset, Micro-in for microphone jack, 1.5 W
speaker (Internal)

Dimensions

Type	Length [m]	Width [m]	Thickness [m]
Tablet computer	0.144	0.242	0.040

Weight

Type	Weight [kg]/[lbs]
CS25 plus/CS25 LRBT plus, with battery	1.3/2.9
CS25 GNSS plus, with battery	1.4/3.0

Recording

Data can be recorded on the USB stick or in the internal memory.

Power

Type	Consumption [W]	External supply voltage
CS25 plus/CS25 LRBT plus	6 - 9	Nominal voltage 12 V DC (---)
CS25 GNSS plus	7.2 - 10.2	Nominal voltage 12 V DC (---)

Internal battery

Type	Battery	Voltage	Capacity	Operating time, typical*
CS25 plus/CS25 LRBT plus	LiPoly	7.4 V	ALG7-08B: 5.2 Ah	8 h
CS25 GNSS plus	LiPoly	7.4 V	ALG7-08B: 5.2 Ah	6 h

* Operating time depends on use of wireless communication devices.

Environmental specifications

Temperature

Type	Operating temperature [°C]	Storage temperature [°C]
Tablet computer	-33 to +63	-40 to +70

Protection against water, dust and sand

Type	Protection
Tablet computer	IP65 (IEC60529) Dust tight Protected against water projected in jets from any direction.


Humidity

Type	Protection
Tablet computer	Up to 93 % The effects of condensation are to be effectively counteracted by periodically drying out the tablet computer.

Interfaces

Type	RS232	USB Host	Bluetooth	LAN	WLAN	Audio
CS25 plus	DSUB9	2* USB A	Class 2	RJ-45	802.11b/g	Micro-In, Audio-Out
CS25 GNSS plus	DSUB9	1* USB A	Class 2	RJ-45	802.11b/g	Micro-In, Audio-Out
CS25 LRBT plus	DSUB9	2* USB A	Class 1	RJ-45	802.11b/g	Micro-In, Audio-Out

L1/L2 GNSS

 Valid for CS25 GNSS plus only.

Type	Values
Channels:	120 channels L1 only Optional: L1/L2 GPS, GLONASS
Satellite signals tracking:	GPS: L1, L2, L2C GLONASS: L1, L2
Integrated real-time:	SBAS (WAAS, EGNOS, GAGAN)
Output data protocols:	NMEA-0183 (GGA, VTG, GLL, GSA, ZDA, GSV, RMC, GST, GRS) via Zeno Connect only
Real-time protocols:	RTCM 2.x, RTCM 3.0, RTCM 3.1, Leica, CMR, CMR+
Update rate:	1 Hz (1 s) Optional: 5 Hz (0.2 s)
Time for initialisation*	Typically 10 s

* May vary due to used antenna, atmospheric conditions, multipath, obstructions, signal geometry and number of tracked satellites.

Conformity to national regulations

- FCC Part 15, 22 and 24 (applicable in US).
- Hereby, Leica Geosystems AG, declares that the CS25 plus and the CS25 LRBT plus are in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC and other applicable European Directives. The declaration of conformity may be consulted at <http://www.leica-geosystems.com/ce>.



Class 1 equipment according European Directive 1999/5/EC (R&TTE) can be placed on the market and be put into service without restrictions in any EEA Member state.

- The conformity for countries with other national regulations not covered by the FCC part 15, 22 and 24 or European directive 1999/5/EC has to be approved prior to use and operation.
- Japanese Radio Law and Japanese Telecommunications Business Law Compliance.
 - This device is granted pursuant to the Japanese Radio Law and the Japanese Telecommunications Business Law.
 - This device should not be modified (otherwise the granted designation number will become invalid).

Frequency band

Type	Frequency band [MHz]
CS25 plus, Bluetooth	2402 - 2480
CS25 plus, WWAN	UMTS/HSDPA 800 / 850 / 900 / 1900 / 2100 Quad-Band EGSM 850 / 900 / 1800 / 1900 GPRS multi-slot class 12 EDGE multi-slot class 12
CS25 plus, WLAN	2400 - 2484

Software Licence Agreement

This product contains software that is preinstalled on the product, or that is supplied to you on a data carrier medium, or that can be downloaded by you online according to prior authorisation from Leica Geosystems. Such software is protected by copyright and other laws and its use is defined and regulated by the Leica Geosystems Software Licence Agreement, which covers aspects such as, but not limited to, Scope of the Licence, Warranty, Intellectual Property Rights, Limitation of Liability, Exclusion of other Assurances, Governing Law and Place of Jurisdiction. Please make sure, that at any time you fully comply with the terms and conditions of the Leica Geosystems Software Licence Agreement.

Such agreement is provided together with all products and can also be referred to and downloaded at the Leica Geosystems home page at <http://www.leica-geosystems.com/swlicense> or collected from your Leica Geosystems distributor.

You must not install or use the software unless you have read and accepted the terms and conditions of the Leica Geosystems Software Licence Agreement. Installation or use of the software or any part thereof, is deemed to be an acceptance of all the terms and conditions of such Licence Agreement. If you do not agree to all or some of the terms of such Licence Agreement, you must not download, install or use the software and you must return the unused software together with its accompanying documentation and the purchase receipt to the distributor from whom you purchased the product within ten (10) days of purchase to obtain a full refund of the purchase price.

820982-1.0.0en

Original text

Printed in Switzerland

© 2014 Leica Geosystems AG, Heerbrugg, Switzerland

Leica Geosystems AG

Heinrich-Wild-Strasse

CH-9435 Heerbrugg

Switzerland

Phone +41 71 727 31 31

www.leica-geosystems.com

- when it has to be **right**

Leica
Geosystems